



WATERPROOFING TO WALL & FLOOR:  
**SWIMMING POOL**  
GIẢI PHÁP CHỐNG THẤM CHO:  
**HỒ BƠI**




Product/ sản phẩm:

**GT – 212**

**Cementitious flexible waterproofing membrane, 2 components**  
**Màng chống thấm gốc xi măng đàn hồi, 2 thành phần**

**GRITONE**

WATERPROOFING TO WALL & FLOOR:  
**SWIMMING POOL**  
 GIẢI PHÁP CHỐNG THẤM CHO:  
**HỒ BƠI**

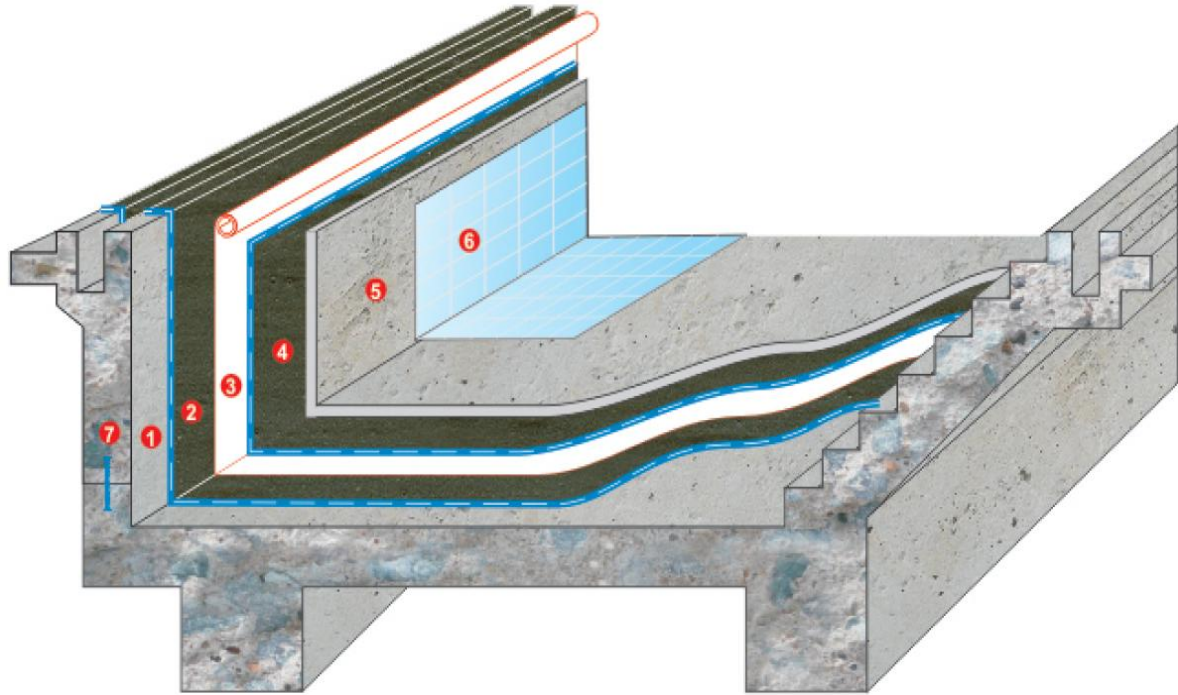


**WATERPROOFING TO FLOOR & WALL**


1. R.C slab, sloped down screed  
1.5~2.0%
2. Waterproofing system: 1 coats of  
GT – 212 (1.4kg/m<sup>2</sup>/coats)
3. Poly glass reinforcement mat.
4. The 2 coats of GT – 212 on the top of  
polyester mat
5. Protectin / Tile adhesive mortar
6. Tile finish
7. PVC waterstop or hyperstop (option)

**CHỐNG THẤM CHO SÀN VÀ TƯỜNG**

1. Đáy B.T.C.T / vữa tạo dốc  
1.5 ~2.0 %
2. Hệ thống chống thấm: 1 lớp  
GT – 212 (1.4/m<sup>2</sup>/lớp)
3. Gia cố lưới thủy tinh
4. Quét : 2 lớp GT – 212 phủ lên toàn bộ  
lớp lưới gia cố
5. Vữa bảo vệ/ Keo dán gạch
6. Gạch hoàn thiện
7. PVC warterstop/hyperstop (tùy chọn)

TYPICAL SPECIFICATION – QUY TRÌNH KỸ THUẬT

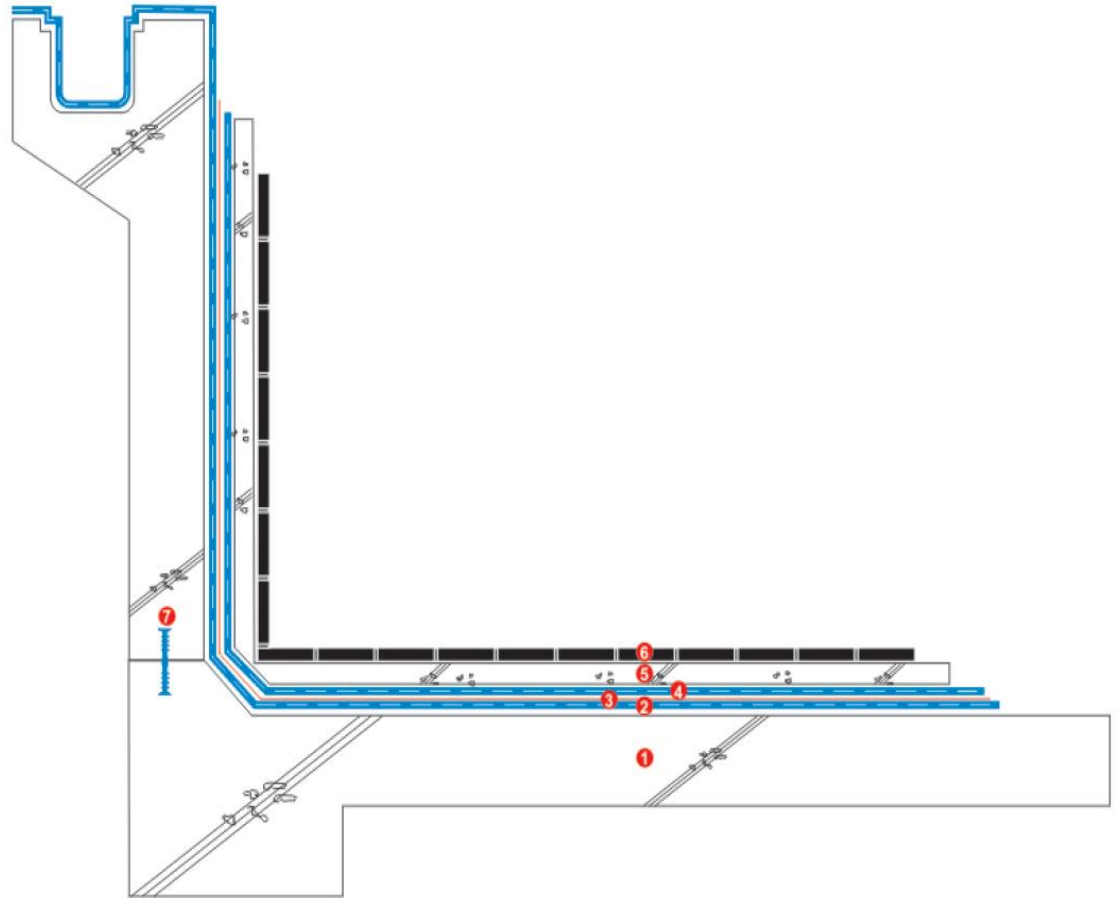

<p>WATERPROOFING TO WALL &amp; FLOOR:  <b>SEPTIC TANK INSIDE SURFACE</b>                  GIẢI PHÁP CHỐNG THẤM CHO:  <b>BỂ NƯỚC THẢI</b></p>		<p><b>Project:</b></p>
<p><b>WATERPROOFING TO FLOOR &amp; WALL</b></p>		<p>Manufacture and supplier by</p>
	<ol style="list-style-type: none"> <li>1. R.C slab, sloped down screed 1.5~2.0%</li> <li>2. Waterproofing system: 1 coats of GT – 212 (1.4kg/m<sup>2</sup>/coats)</li> <li>3. Poly glass reinforcement mat.</li> <li>4. The 2 coats of GT – 212 on the top of polyester mat</li> <li>5. Protectin / Tile adhesive mortar</li> <li>6. Tile finish</li> <li>7. PVC waterstop or hyperstop (option)</li> </ol>	